


# Vantage Spatial Sounder

*For all Control Equipment control panels*

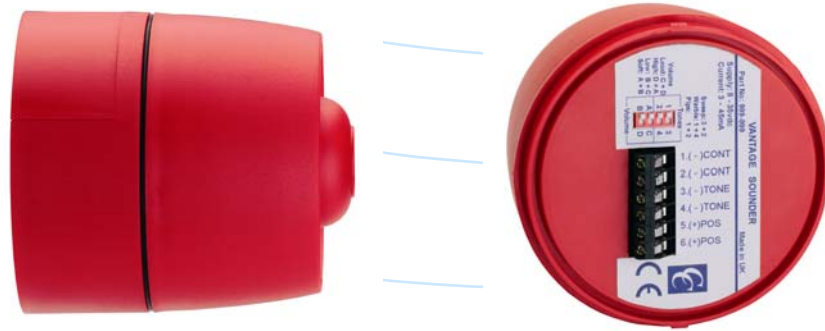


## Key Features

- ◆ For use with all Control Equipment panels
- ◆ Four sound settings, switch selectable
- ◆ Three volume setting, switch selectable
- ◆ Deep base and shallow base options
- ◆ Deep base version protected to IP65
- ◆ Alternative tones available for non-UK market requirements
- ◆ High output 105dBA as standard
- ◆ Wide sound distribution

From the UK's leading control panel manufacturer



INVESTOR IN PEOPLE



## Introduction

The Vantage sounder is a wall mounted multi-tone electronic sounder for use with all standard 24v DC alarm circuits. The standard 105 dBA output means that the customer can select, via the dil switch, the appropriate volume setting (low, medium or high) together with the required tone. The shallow mounting base offers an easy access way through into the main sounder body, reducing installation time. The deep mounting base for IP65 applications has an easily removable cover plate. This option also gives the choice for wiring from the ceiling (cover plate removed) or directly into the rear of the mounting base (cover plate left in place).

An innovative approach to design means that light output from the Vantage Sounder/ Beacon is efficiently produced via a new low current LED cluster. Synchronisation of light output is standard, as is the option to operate the unit as a flasher/beacon only. The Vantage Sounder/Beacon is ideal for applications requiring an additional light output such as sheltered accommodation, hospitals and airports.

## Technical Specifications

<b>Supply Voltage:</b>	12-35v DC			
<b>Sound Output:</b>	<b>Typical</b>	<b>EN54</b>	<b>Current Consumption 24vDC</b>	
	<b>@ 1m</b>	<b>Requirement</b>	<b>Sounder</b>	<b>Sounder/Beacon</b>
<b>High</b>	105 dBA	100 dBA	< 30mA	50mA
<b>Medium</b>	101 dBA	95 dBA	< 14mA	35mA
<b>Low</b>	87 dBA	85 dBA	< 7mA	30mA
<b>Tones:</b>	Sweep, warble, pips and continuous			
<b>Frequency:</b>	800-1000 Hz			
<b>Temperature Range:</b>	-20 to +70 °C			
<b>Protection:</b>	Deep base = IP65, Shallow base = IP43			
<b>Weight (Packed):</b>	Deep base = 220g, Shallow base = 195g			

## Part Numbers

<b>2601/050</b>	Vantage 105 DB red deep base
<b>2601/051</b>	Vantage 105 DB red shallow base
<b>2601/052</b>	Vantage 105 DB white deep base
<b>2601/053</b>	Vantage 105 DB white shallow base
<b>2601/054</b>	Vantage sounder/beacon RC/RL
<b>2601/055</b>	Vantage sounder/beacon RC/AL
<b>2601/056</b>	Vantage sounder/beacon RC/BL
<b>2601/057</b>	Vantage sounder/beacon WC/RL
<b>2601/058</b>	Vantage sounder/beacon WC/AL
<b>2601/059</b>	Vantage sounder/beacon WC/BL

From the UK's leading control panel manufacturer

Control Equipment Ltd, Hillcrest Business Park, Cinderbank, Dudley, West Midlands, DY2 9AP, United Kingdom

Phone: +44 (0)1384 458651 Fax: +44 (0)1384 458972  
 Email: celsales@controlequipment.co.uk Website: www.controlequipment.com

VantageSL/rev0/10.02