

Interior Status Indicator Unit

For use with Prescient^{II} and R3 Control Panels



Key Features

- ◆ Ideal for use with Prescient^{II} and R3 control panels
- ◆ Attractive style to match Prescient^{II} panels
- ◆ Clear and bright LED status indications
- ◆ Removable grommets for cable installation
- ◆ Push button controls may be tagged & sealed for security
- ◆ Auto / Manual selection Key-switch
- ◆ Manual Release, Timer Hold and Abort functions available

From the UK's leading control panel manufacturer




Assessed to ISO 9001: 2000
Certificate number 018



British Fire Protection Systems Association



INVESTOR IN PEOPLE



Introduction


The status indicator unit is designed for use with the Prescient^{II} control panel or the R3 rack system. There are two different types of status indicator, all giving separate lamp indications for auto, manual and discharged conditions.

The basic status indicator has the lamp indications and auto-manual key switch. The second type allows the additional functions of a timer hold, abort and manual release function. Up to 8 status indicator units may be powered from one Prescient^{II} panel. The inputs for the timer hold, abort and manual release are fully monitored.

Technical Specifications

Unit Dimensions:	155mm wide x 140mm high x 70mm deep (including controls)
Current Consumption at 24v DC:	24 mA per lit indication
End of Line Resistor for Prescient Panel:	3k9 ohms 0.25 watt
End of Line Resistor for R3 Rack System:	4k7 ohms 0.25 watt

Connection Details

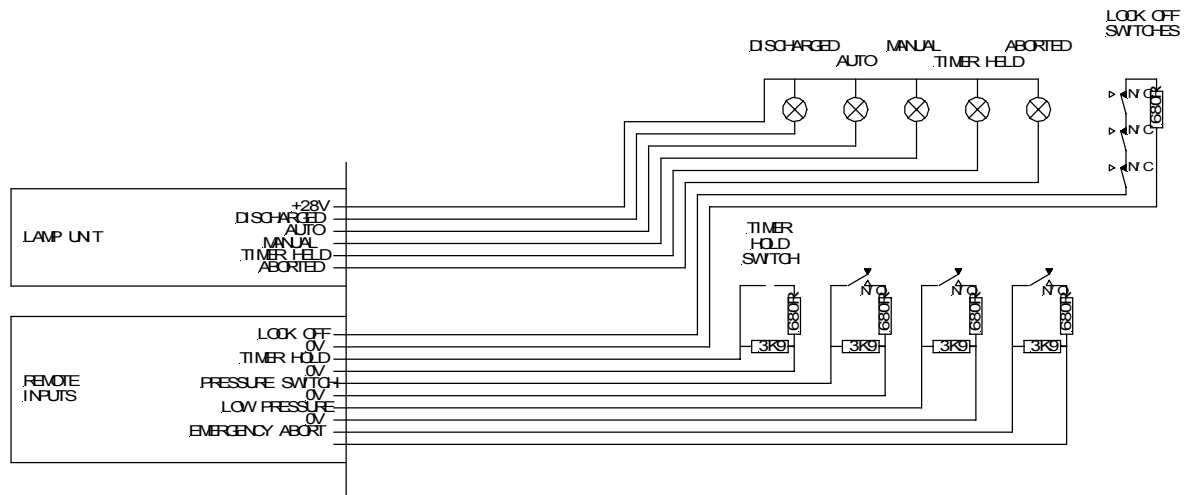

Part Numbers

2500/119	Basic status indicator unit
2500/120	Status indicator with manual release, timer hold and auto/manual keyswitch

From the UK's leading control panel manufacturer

Control Equipment Ltd, Hillcrest Business Park, Cinderbank, Dudley, West Midlands, DY2 9AP, United Kingdom

Phone: +44 (0)1384 458651 Fax: +44 (0)1384 458972
 Email: celsales@controlequipment.co.uk Website: www.controlequipment.com